

Module 5: W600 x D300 x H580 mm



i) 9321399-with wooden shelf

ii) 9321425-with glass shelf

iii) 9321427-with wooden & glass shelf

PROFILE & CONNECTORS



A



B



C



D



E




F

A - Basic Profile
B - Glass Profile
C - Wood Profile
D - 3 Way 3d Connector
E - 4 Way 3d Connector
F - Wall mount set


STEP 1

Make top & bottom part of the cube by connecting cube profiles with connectors required as per design

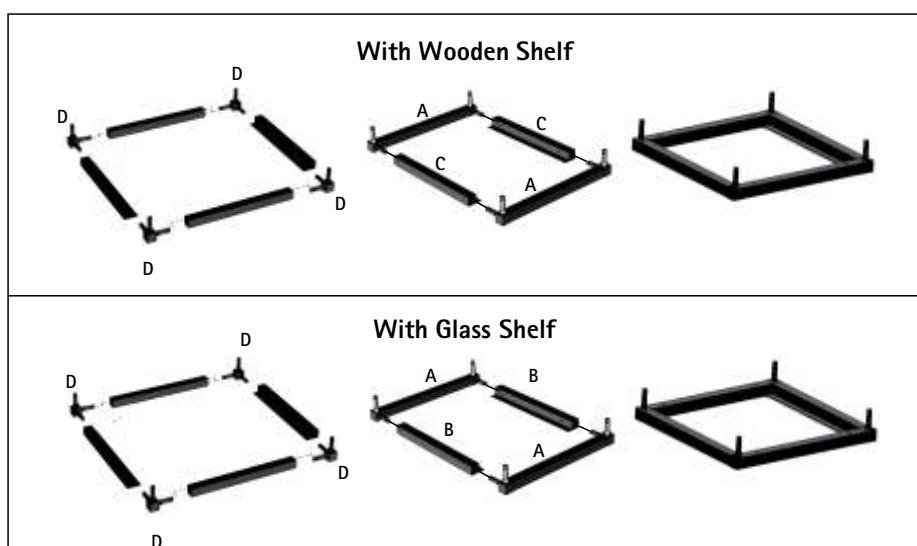

STEP 2

Make Middle part of the cube by connecting cube profiles with connectors required as per design

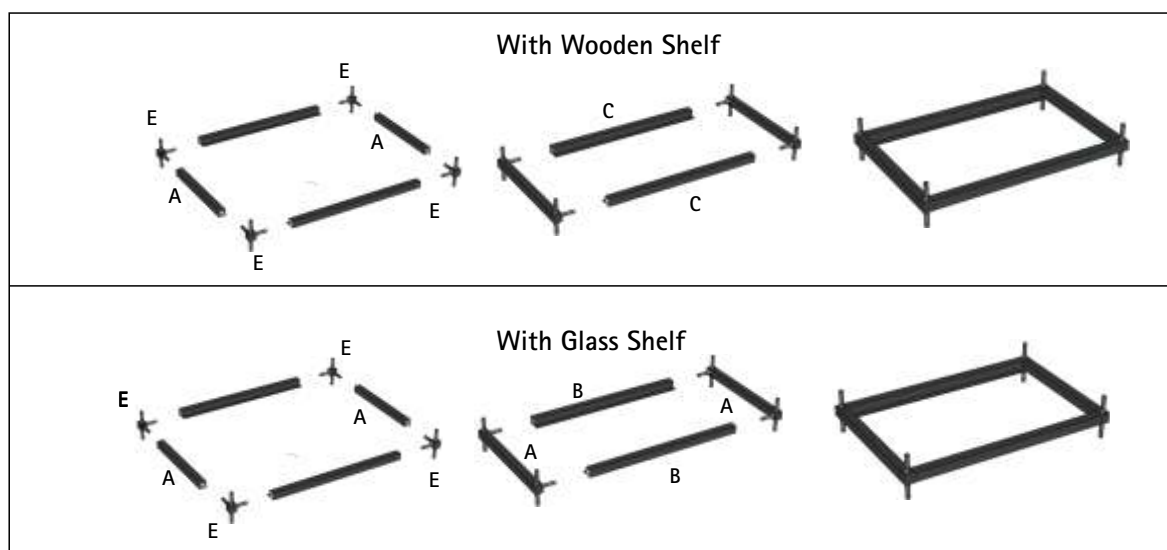

STEP 3

Insert screw at all position in diagonally opposite pattern.


Note:

- ▶ Screw should be kept loose at this step
- ▶ Flatness should be maintained, it should not wobble.



STEP 4

Insert vertical profiles between Top & Middle part and Bottom & Middle part

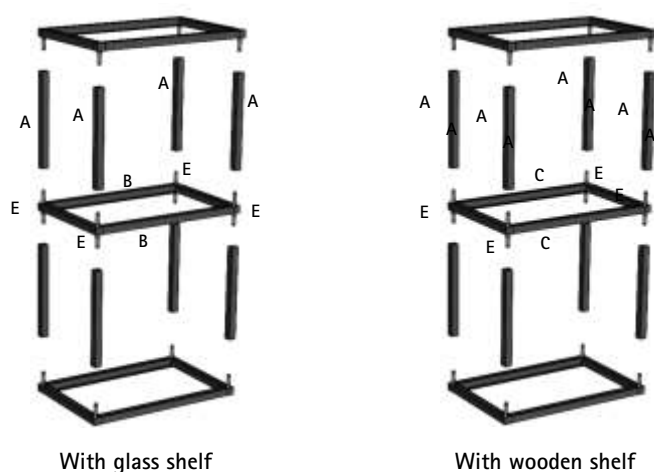

STEP 5

Insert screw at all position & tight all the screw present in cube in diagonally opposite pattern and put the cover caps for concealing the screws.





Note:


- ▶ Screw should not be over tightened
- ▶ Screw should be kept little loose to maintain flatness & should be fitted in diagonally opposite pattern
- ▶ Flatness should be maintained, it should not wobble



STEP 6

- ▶ Drill on wall as per drilling dimension given
- ▶ Fix Wall Mounting Bracket using Wall screw & Plug
- ▶ Hang the structure on brackets & do height adjustment if required
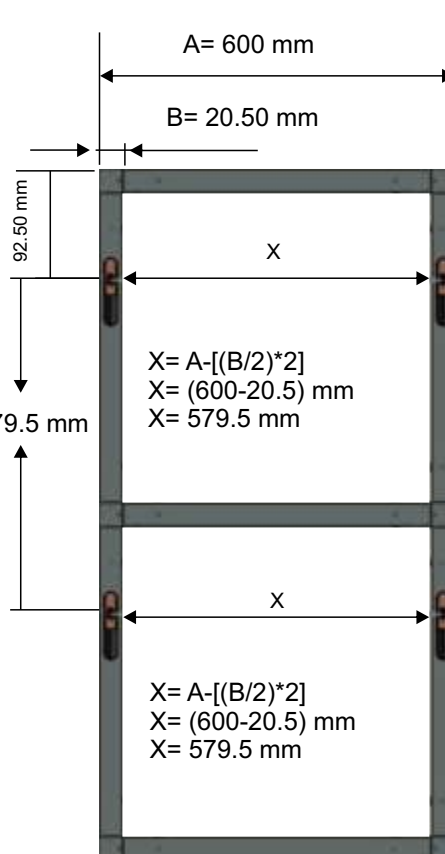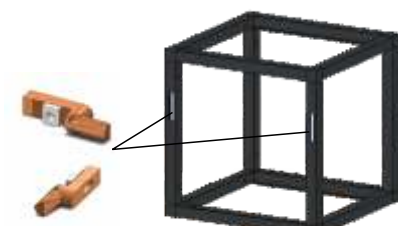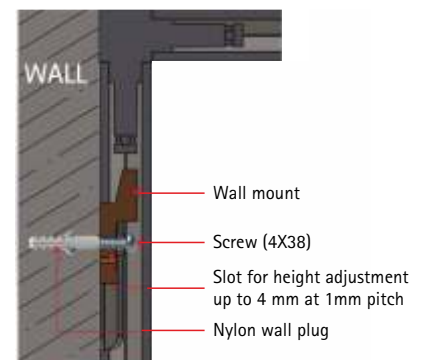
<p>A</p>  <p>A = 600 mm B = 20.50 mm 92.50 mm X X = A - [(B/2) * 2] X = (600 - 20.5) mm X = 579.5 mm 279.5 mm X X = A - [(B/2) * 2] X = (600 - 20.5) mm X = 579.5 mm</p>	<p>B</p>  <p>C</p>  <p>WALL Wall mount Screw (4X38) Slot for height adjustment up to 4 mm at 1mm pitch Nylon wall plug</p> <p>D</p> 
--	--

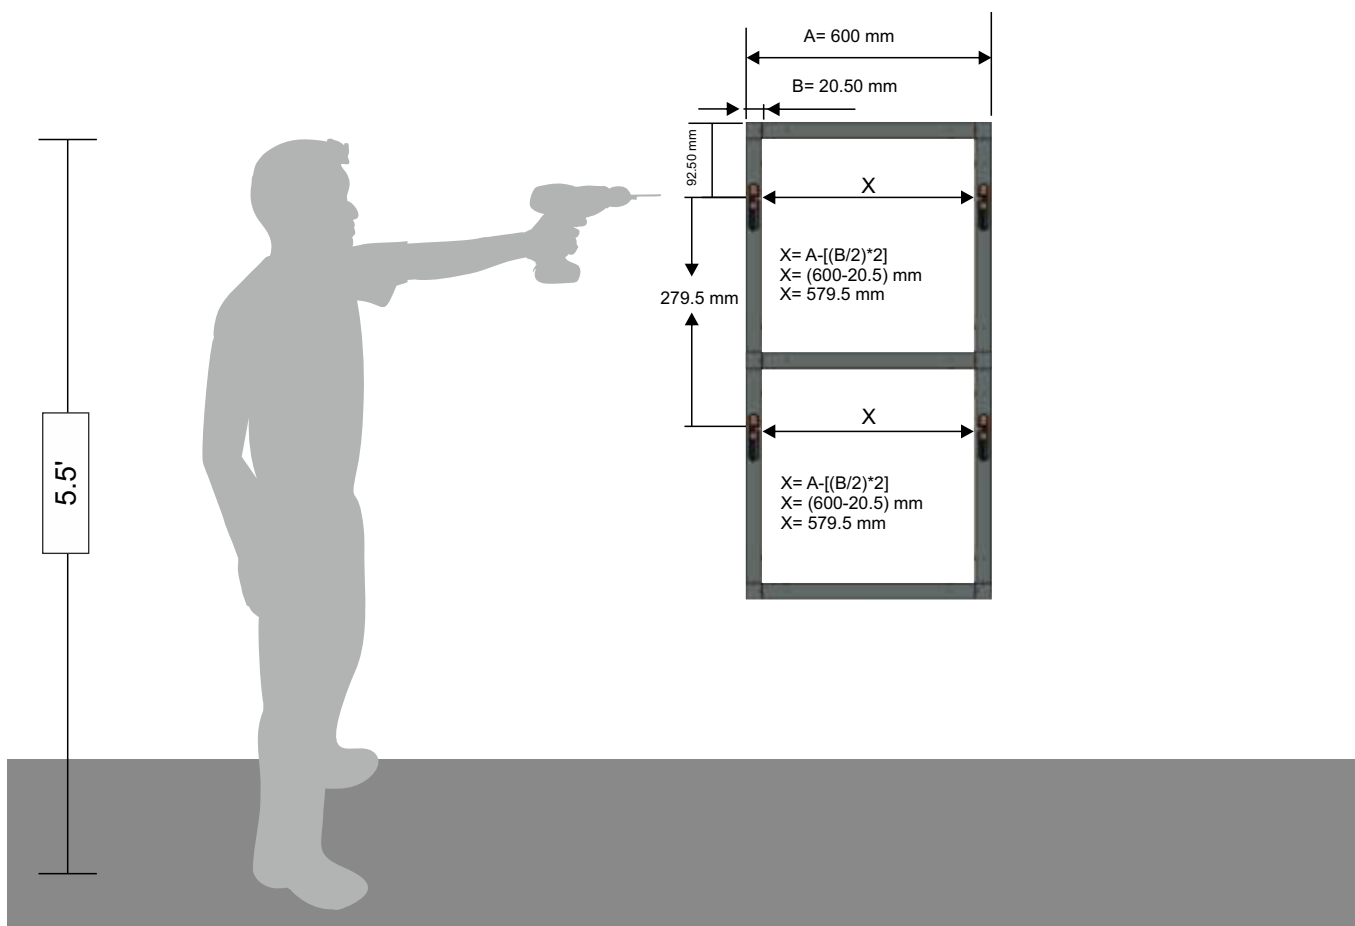

Maximum weight capacity

